

CUSTOMER DRAWING


- Note -

1. MUST BE FREE OF FLASH AND BURR THAT AFFECT USING
2. MARKING & CAV. No. BY AS A GENERAL RULE OF KUM
3. △A PANEL THICKNESS : 4.5 ~ 5.0mm
4. MUST BE USING WITH DESIGNATED PANEL HOLE
   - PANEL HOLE SIZE : ∅8.5

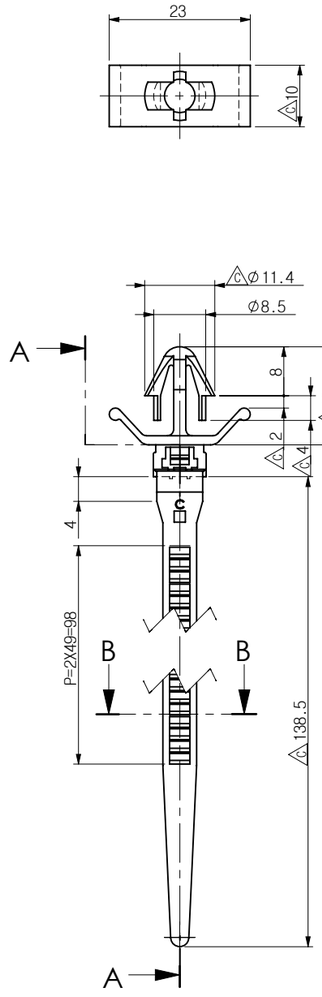


SECTION A-A

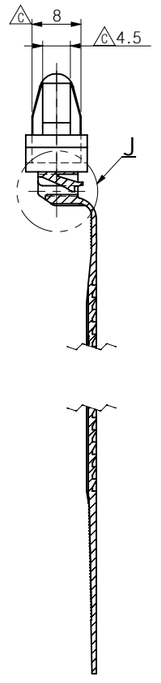


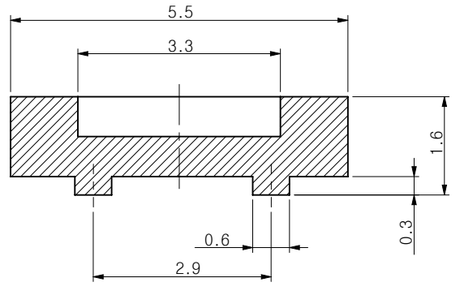

SECTION B-B(10/1)

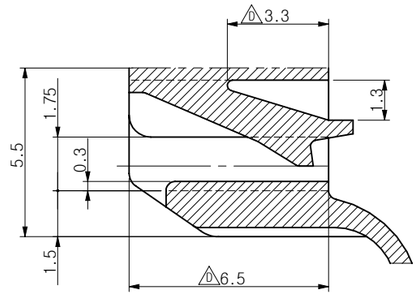

DETAIL-J(5/1)



ISO-VIEW

참 고 용

CJW	10.04.26	E010-0046	△D	CHANGED SHAPE(2 POINT)	JJS
CJW	03.10.27	AH03061	△C	CORRECTION OF ERRATA(8 POINT)	SSJ
CJW	03.02.17	AH03007	△B	CHANGED MARK OF MATERIAL	KMH
CJW	98.12.17	–	△A	CHANGED PANEL SPEC(1 POINT)	CYM
CJW	95.08.24	–	△-	RELEASED	RHS
APVD	DATE	NOTE NO.	SYM	ALTERATION	DWN

GENERAL TOLERANCE							
	10MAX	50MAX	100MAX	150MAX	200MAX	200VR	ANGLE
A	±0.2	±0.3	±0.5	±0.8	±1.0	±1.4	±30'

BAND CABLE-C(B)	KPP011-98030				BLACK	△B PA
BAND CABLE-C(GY)	KPP011-99030				GRAY	△B PA
PART NAME	PART NO.				COLOR	MATERIAL
THIRD ANGLE PROJECTION	A	1/1(5/1,10/1)	RHS	JJS	KDK	CJW
	TOLERANCE	SCALE	DESIGN	DRAWN	CHECKED	APPROVED

DRAWING NAME	BAND CABLE-C(GY)
DRAWING NO.	KPP011-99030-C01D

KUM 케이유엠주식회사