


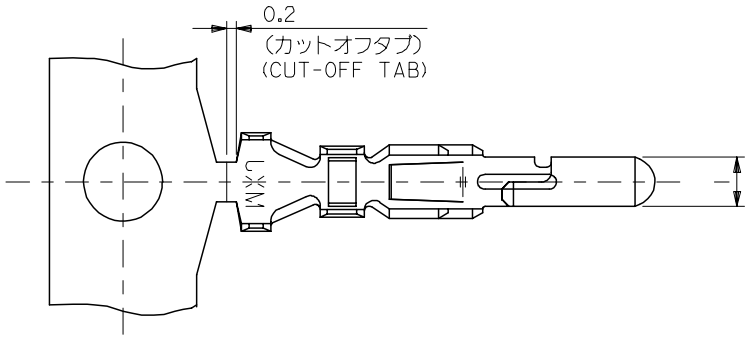





SECT.A-A



SECT.B-B

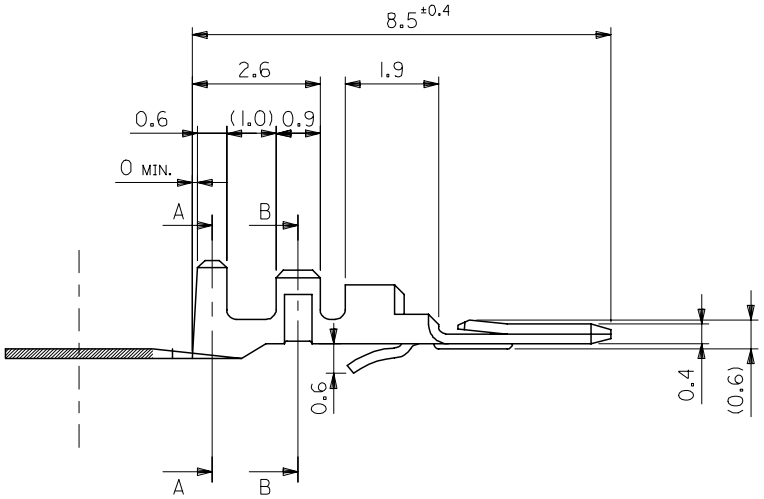



注記
NOTES

1. 適合ハウジング ： 51006
   APPLICABLE HOUSING : 51006
2. 嵌合相手 ： 50013
   MATE WITH : 50013
3. ELV 及び RoHS適合品
   ELV AND RoHS COMPLIANT.

50012-8100	バラ状 LOOSE
50012-8000	連鎖状 CHAIN
MATERIAL NO.	端子形状 FORM

50012-8×00
MODEL NO.

材料 MATERIAL: リン青銅 錫メッキ (t=0.2) PHOS. BRO. PRE-TINNED (t=0.2)
仕上げ FINISH: #
適用電線範囲 WIRE RANGE: AWG#24 ~ #28
被覆外径 INS. RANGE: Ø0.9 ~ Ø1.15

REVISED
EC NO: J2008-0075 2007/07/16
DRWN:MNABEI 2007/07/17
CHKD:THARUYAMA 2007/07/17
APPR:NUKITA 2007/07/17
DESCRIPTION
REV: C

GENERAL TOLERANCES (UNLESS SPECIFIED)

10 UNDER	±0.2
10 OVER 30 UNDER	±0.25
30 OVER	±0.3
ANGULAR	±3 °

DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS

DIMENSION STYLE: MM ONLY	SCALE: 10:1	DESIGN UNITS: METRIC	THIRD ANGLE PROJECTION
DRAWN BY: T.YASUI	DATE: '95/08/21	TITLE: 2.0 WIRE TO WIRE CONN. CRIMP PIN	
CHECKED BY: H.HIRAMOTO	DATE: '95/08/22		
APPROVED BY: M.FUKUSHIMA	DATE: '95/08/22	MOLEX INCORPORATED	
MATERIAL NO.: SEE TABLE		DOCUMENT NO.: SD-50012-001	SHEET NO.: 1 OF 1
SIZE: A3		THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION	