
nichicon


UPW

Miniature Sized, Low Impedance, High Reliability For Switching Power Supplies

Smaller | Low Impedance | Long Life | Anti-Solvent Feature (Through 100V only)

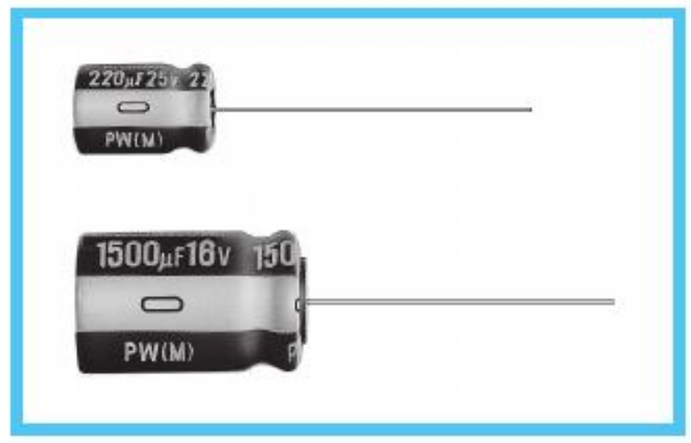

- Smaller case size and lower impedance than UPM.
- Low impedance and high reliability withstanding 2000 hours to 8000 hours.
- Capacitance ranges available based on the numerical values in E12 series under JIS.
- Compliant to the RoHS directive (2011/65/EU).
- AEC-Q200 compliant. Please contact us for details.

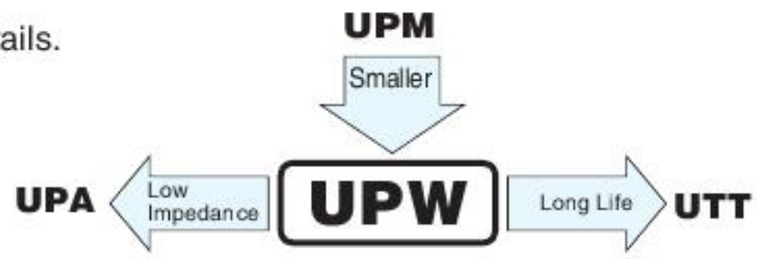

■Specifications

Item	Performance Characteristics
Category Temperature Range	−55 to +105˚C (6.3 to 100V), −40 to + 105˚C (160 to 400V), −25 to +105˚C (450V)
Rated Voltage Range	6.3 to 450V
Rated Capacitance Range	0.47 to 15000µF
Capacitance Tolerance	±20% at 120Hz, 20˚C
Leakage Current	Rated voltage (V): 6.3 to 100 — Leakage current: After 1 minute's application of rated voltage at 20˚C, leakage current is not more than 0.03CV or 4 (µA), whichever is greater. / 160 to 450 — CV ≦ 1000 : I = 0.1CV+40 (µA) max. CV > 1000 : I = 0.04CV+100 (µA) max.
Tangent of loss angle (tan δ)	For capacitance of more than 1000µF, add 0.02 for every increase of 1000µF. Measurement frequency : 120Hz at 20˚C

Rated voltage (V)	6.3	10	16	25	35	50	63	100	160 to 250	315 · 350	400 · 450
tan δ (MAX.)	0.22	0.19	0.16	0.14	0.12	0.10	0.09	0.08	0.15	0.20	0.25

Stability at Low Temperature — 120Hz

Rated voltage (V)		6.3 · 10	16 · 25	35 · 50	63 · 100	160 · 200	250	315 · 350	400	450
Impedance ratio (MAX.)	Z−25˚C / Z+20˚C	—	—	—	—	3	3	4	6	15
	Z−40˚C / Z+20˚C	—	—	—	—	4	6	8	10	—
	Z−55˚C / Z+20˚C	3	3	3	3	—	—	—	—	—


Endurance — The specifications listed at right shall be met when the capacitors are restored to 20˚C after D.C. bias plus rated ripple current is applied for 8000 hours (2000 hours for φD=4, 5 and 6.3, 3000 hours for φD=8, 5000 hours for φD=10, 7000 hours for φD=12.5) at 105˚C, the peak voltage shall not exceed the rated voltage.

Capacitance change	Within ±20% of the initial capacitance value
tan δ	200% or less than the initial specified value
Leakage current	Less than or equal to the initial specified value


Shelf Life — After storing the capacitors under no load at 105˚C for 1000 hours and then performing voltage treatment based on JIS C 5101-4 clause 4.1 at 20°C, they shall meet the specified values for the endurance characteristics listed above.

Marking — Printed with white color letter on dark brown sleeve.

■Radial Lead Type

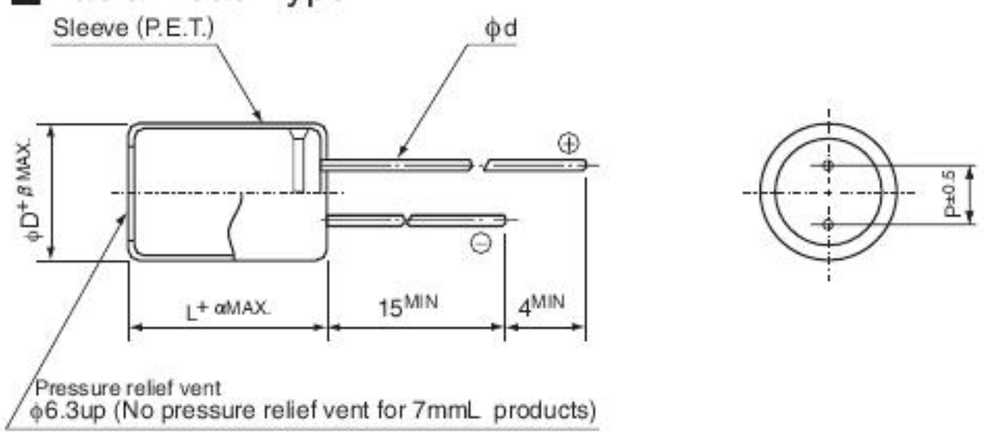

Type numbering system (Example : 10V 680µF)

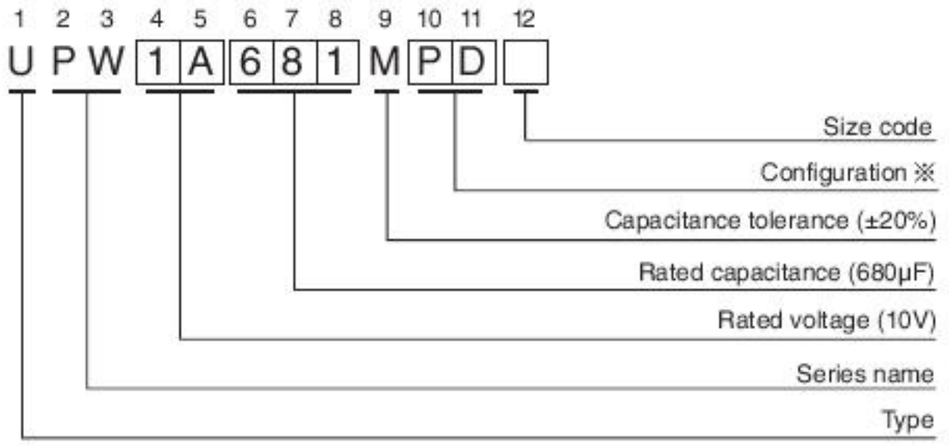

α	
	(L = 7) 1.0
	(L < 20) 1.5
	(L ≧ 20) 2.0

(mm)

φD	4	5	6.3	8	10	12.5	16	18	20	22	25
P	1.5	2.0	2.5	3.5	5.0	5.0	7.5	7.5	10.0	10.0	12.5
φd	0.45	0.5 (0.45)	0.5 (0.45)	0.6	0.6	0.6 ※0.8	0.8	0.8	1.0	1.0	1.0
β	0.5	0.5	0.5	0.5	0.5	0.5	0.5	0.5	0.5	1.0	1.0

※: Applied to L>25 products
( ): Applied to 7mmL products

※Configuration

φ D	Pb-free leadwire Pb-free PET sleeve
4 · 5	DD
6.3	ED (7mm L: DD)
8 · 10	PD
12.5 to 18	HD
20 to 25	RD

• Please refer to page 20 about the end seal configuration.

• Frequency coefficient of rated ripple current

V	Cap. (µF) \ Frequency	50Hz	120Hz	300Hz	1kHz	10kHz or more
6.3 to 100	2.2 to 56	0.20	0.30	0.50	0.80	1.00
	68 to 330	0.55	0.65	0.75	0.85	1.00
	390 to 1000	0.70	0.75	0.80	0.90	1.00
	1200 to 15000	0.80	0.85	0.90	0.95	1.00
160 to 450	0.47 to 220	0.80	1.00	1.25	1.40	1.60
	330 to 470	0.90	1.00	1.10	1.13	1.15

Please refer to page 20, 21, 22 about the formed or taped product spec.
Please refer to page 4 for the minimum order quantity.
• Dimension table in next page.