
Wide Gap Slotted Optical Switch

OPB800 (L and W Series)



Features:

- 0.375” (9.525 mm) wide gap
- Choice of aperture size
- Choice of minimum photocurrent
- Choice of opaque or IR transmissive shells
- Available for PCBoard mounting or with 24” 26 AWG wires

Description:

The OPB800L series, PCBoard mounting, of wide gap switch provides the flexibility of a custom device from a standard product line, while the OPB800W series, remote mounted, switch offers 24” (610 mm) 26 AWG wire interconnect.

Building from a standard housing that utilizes a 0.375” (9.5 mm) wide slot, a user can specify the electrical output parameters, discrete shell material and the aperture width.

Housings are made from an opaque grade of injection-molded plastic that minimizes the assembly’s sensitivity to visible and near-infrared ambient radiation. Discrete shells, which are exposed on parallel faces inside the device throat, are made of IR transmissive plastic (for applications where aperture contamination may occur) or of opaque plastic with aperture openings (for maximum protection against ambient light).

Applications:

- Non-contact interruptive object sensing
- Assembly line automation
- Machine automation
- Equipment security
- Machine safety

CONTAINS POLYSULFONE

To avoid stress cracking, we suggest using ND Industries’ **Vibra-Tite** for thread-locking. **ND Vibra-Tite VC-3** evaporates fast without causing structural failure in OPTEK’s molded plastics.

Part Number Guide

OPB 8 X X X X X Z

Optek Assembly

Phototransistor Output Family

Discrete Shell Material:
0 — Transmissive plastic Discrete shell
1 — Opaque plastic Discrete shell

Electrical Specification Variations:
0 = Electrical Parameter A
1 = Electrical Parameter B
2 = Electrical Parameter C

For “W” series only
Sensor Aperture:
1 — 0.010” (.254 mm)
5 — 0.050” (1.270 mm)

Emitter Aperture:
5 — 0.050” (1.270 mm)

Mounting configurations:
L — Solder lead termination
W — Wire termination

Note: Assemblies with 0.010” apertures are currently available with electrical parameter “A” only.
Wires = 26AWG—24” Long

General Note
TT Electronics reserves the right to make changes in product specification without notice or liability. All information is subject to TT Electronics’ own data and is considered accurate at time of going to print.

© TT electronics plc

TT Electronics | OPTEK Technology
2900 E. Plano Pkwy, Plano, TX 75074 | Ph: +1 972 323 2200
www.ttelectronics.com | sensors@ttelectronics.com

Wide Gap Slotted Optical Switch

OPB800 (L and W Series)

Electrical Specifications

Absolute Maximum Ratings (T_A = 25 °C unless otherwise noted)


Storage and Operating Temperature L Series W Series	 -40 °C to +85 °C -40 °C to +80 °C
Lead Soldering Temperature [1/16 inch (1.6 mm) from the case for 5 sec. with soldering iron][2]	260 °C

Input Diode

Forward DC Current	50 mA
Peak Forward Current (1 µs pulse width, 300 pps)	3 A
Reverse DC Voltage	2 V
Power Dissipation[1]	100 mW

Output Phototransistor

Collector-Emitter Voltage	30 V
Emitter-Collector Voltage	5 V
Collector DC Current	30 mA
Power Dissipation[1]	100 mW

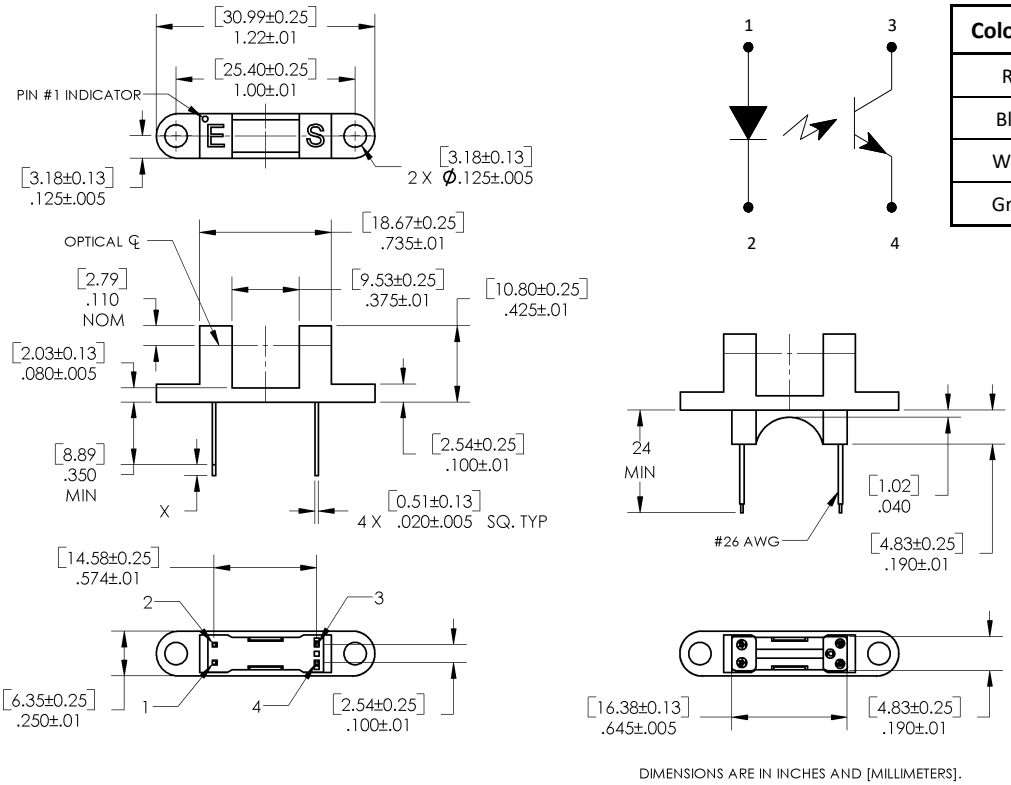

Color/Pin #	Description
Red-1	Anode
Black-2	Cathode
White-3	Collector
Green-4	Emitter

DIMENSIONS ARE IN INCHES AND [MILLIMETERS].

General Note
TT Electronics reserves the right to make changes in product specification without notice or liability. All information is subject to TT Electronics' own data and is considered accurate at time of going to print.

© TT electronics plc

TT Electronics | OPTEK Technology
2900 E. Plano Pkwy, Plano, TX 75074 | Ph: +1 972 323 2200
www.ttelectronics.com | sensors@ttelectronics.com

Electrical Specifications

Electrical Characteristics (T_A = 25 °C unless otherwise noted)

SYMBOL	PARAMETER	MIN	TYP	MAX	UNITS	TEST CONDITIONS
Input Diode						
V_F	Forward Voltage	-	-	1.7	V	I_F = 20 mA
I_R	Reverse Current	-	-	100	µA	V_R = 2 V
Output Phototransistor						
$V_{(BR)CEO}$	Collector-Emitter Breakdown Voltage	30	-	-	V	I_C = 1 mA
$V_{(BR)ECO}$	Emitter-Collector Breakdown Voltage	5	-	-	V	I_E = 100 µA
I_{CEO}	Collector-Emitter Dark Current	-	-	100	nA	V_{CE} = 10 V
Combined						
$V_{CE(SAT)}$	Collector-Emitter Saturation Voltage					
	Parameter A (OPB800,OPB810)	-	-	0.4	V	I_C = 250 µA, I_F = 20 mA
	Parameter B (OPB801,OPB811)	-	-	0.4	V	I_C = 500 µA, I_F = 10 mA
	Parameter C (OPB802,OPB812)	-	-	0.6	V	I_C = 1800 µA, I_F = 20 mA
$I_{C(ON)}$	On-State Collector Current					
	Parameter A (OPB800,OPB810)	0.625	-	-		V_{CE} = 10 V, I_F = 20 mA
	Parameter B (OPB801,OPB811)	1.25	-	-	mA	V_{CE} = 5 V, I_F = 10 mA
	Parameter C (OPB802,OPB812)	2.25	-	-		V_{CE} = 0.6 V, I_F = 20 mA

Notes:

(1) Derate linearly 1.67 mW/°C above 25 °C.

(2) RMA flux is recommended. Duration can be extended to 10 seconds maximum when flow soldering.

(3) All parameters tested using pulse technique.

(4) Methanol or isopropanol are recommended as cleaning agents. Plastic housing is soluble in chlorinated hydrocarbons and ketones.


(5) The W Series includes wire terminations of 24" (610 mm) 7-strand, 26 AWG UL insulated wire on each terminal. Each device incorporates a wire strain relief at the housing surface. The insulation functions and colors are: anode (red), cathode (black), phototransistor collector (white) and phototransistor emitter (green).


General Note


TT Electronics reserves the right to make changes in product specification without notice or liability. All information is subject to TT Electronics' own data and is considered accurate at time of going to print.


© TT electronics plc

Performance

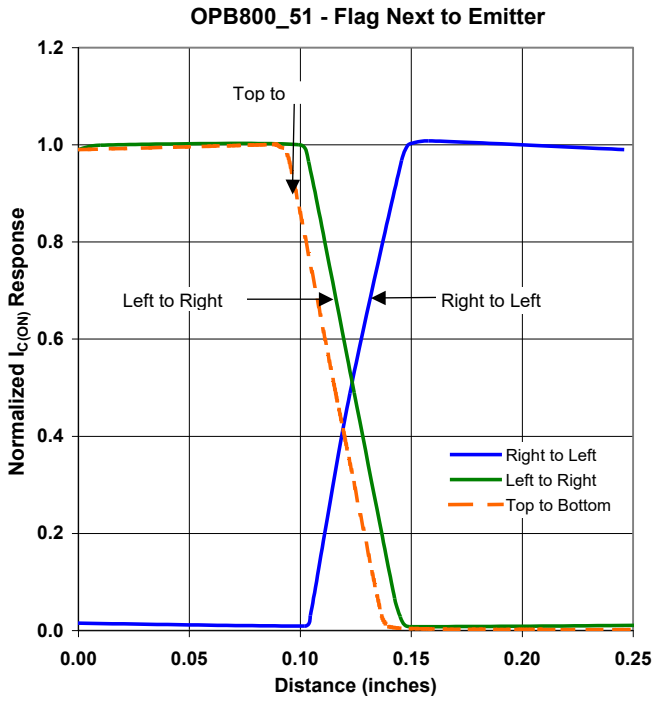

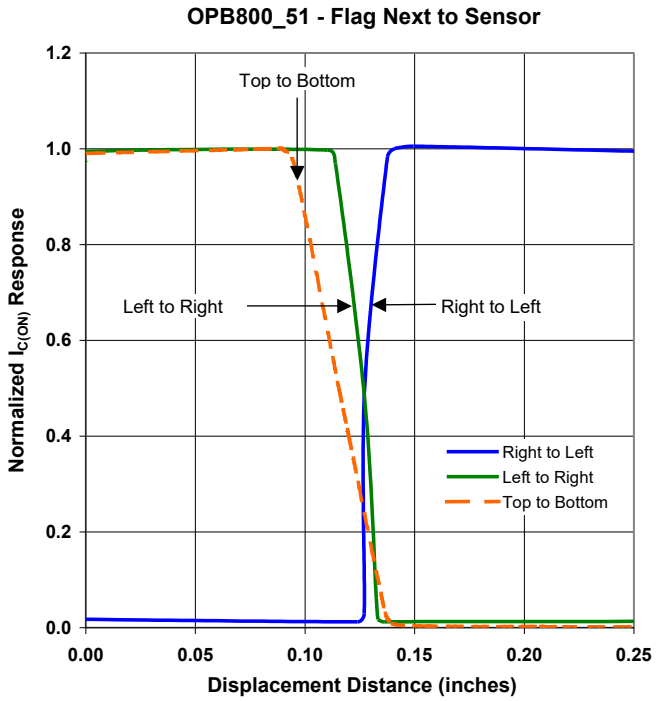

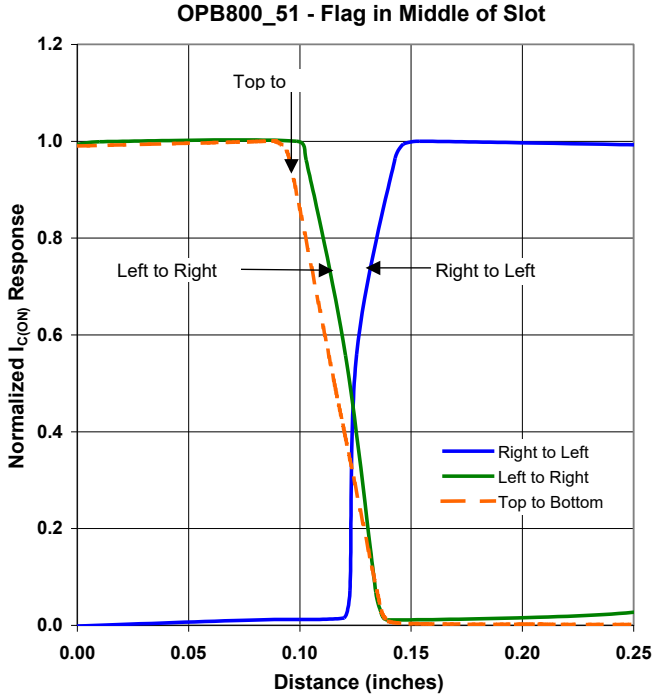

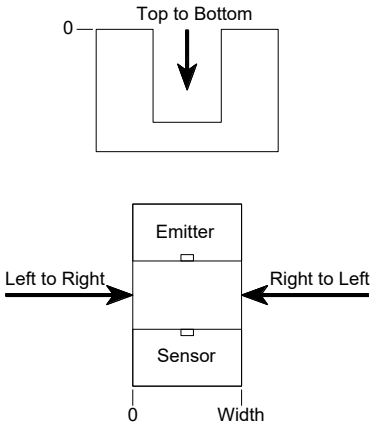



General Note
TT Electronics reserves the right to make changes in product specification without notice or liability. All information is subject to TT Electronics' own data and is considered accurate at time of going to print.


© TT electronics plc


TT Electronics | OPTEK Technology
2900 E. Plano Pkwy, Plano, TX 75074 | Ph: +1 972 323 2200
www.ttelectronics.com | sensors@ttelectronics.com

Performance

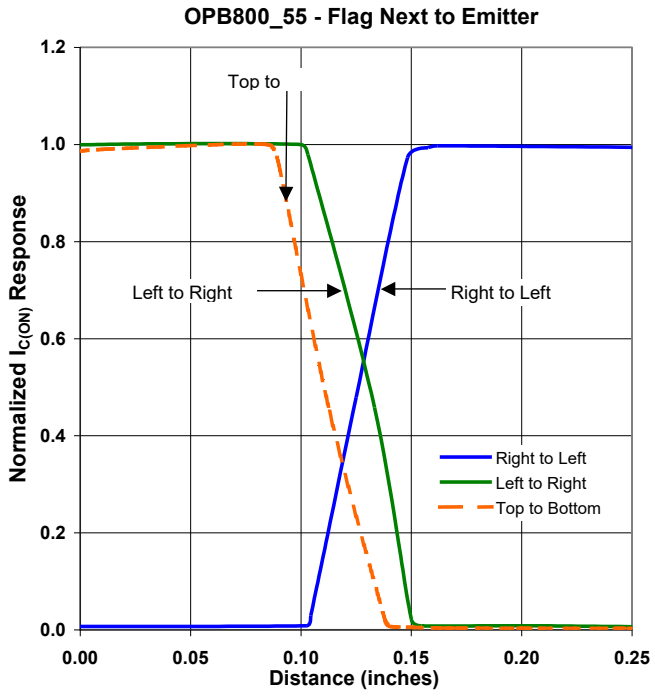

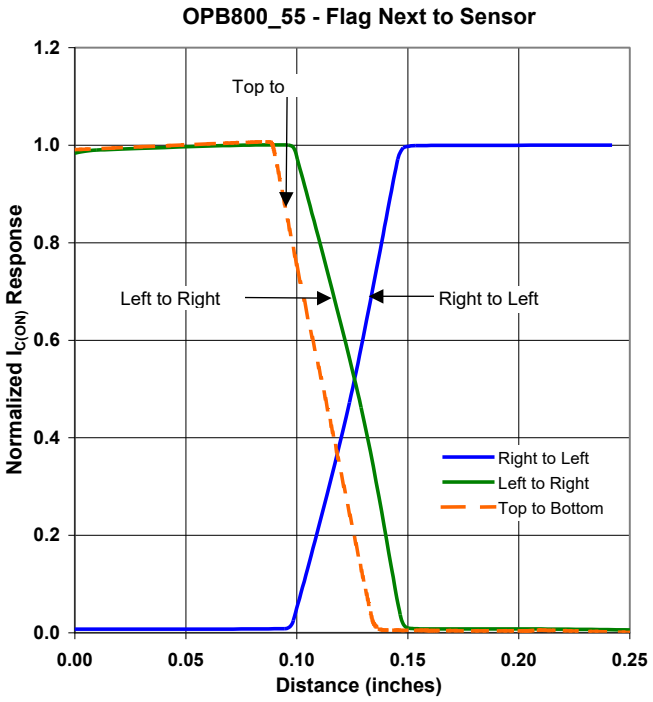

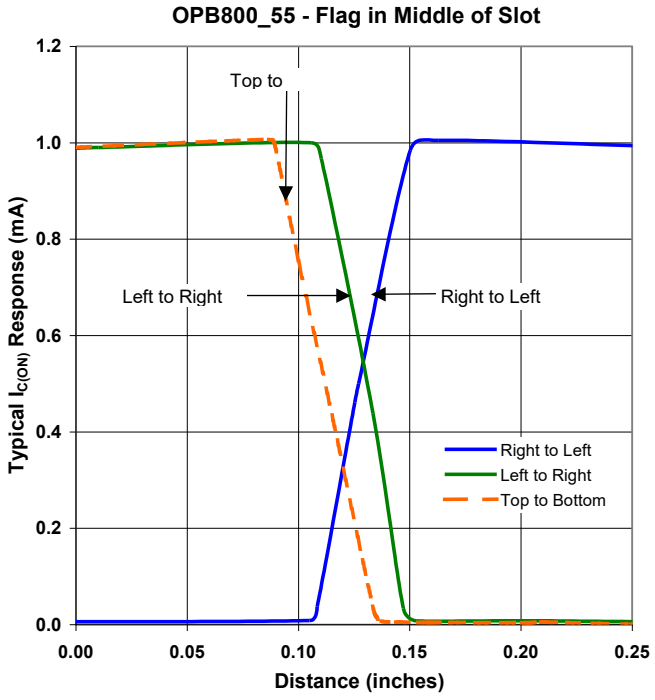

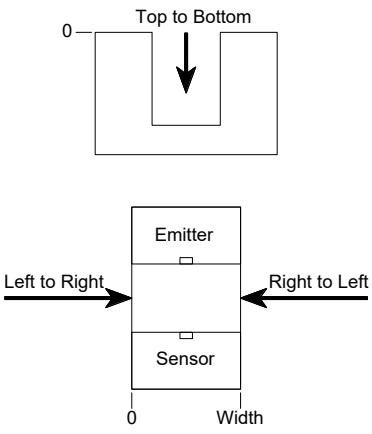

General Note
TT Electronics reserves the right to make changes in product specification without notice or liability. All information is subject to TT Electronics' own data and is considered accurate at time of going to print.

© TT electronics plc

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

TT Electronics:

OPB810L51 OPB800W51Z OPB800W55Z OPB801W55Z OPB802W55Z OPB810W51Z OPB810W55Z OPB811W55Z OPB812W55Z OPB800L51 OPB800L55 OPB801L55 OPB812L55 OPB811L55 OPB802L55